Varianttabell				
Artikelnummer	E-nummer	Ytbehandling (utöver varmförzinkning)	Kulör	Glanstal
SS802960-P001	7780489	Pulverlackerad	RAL 9005	GL 65

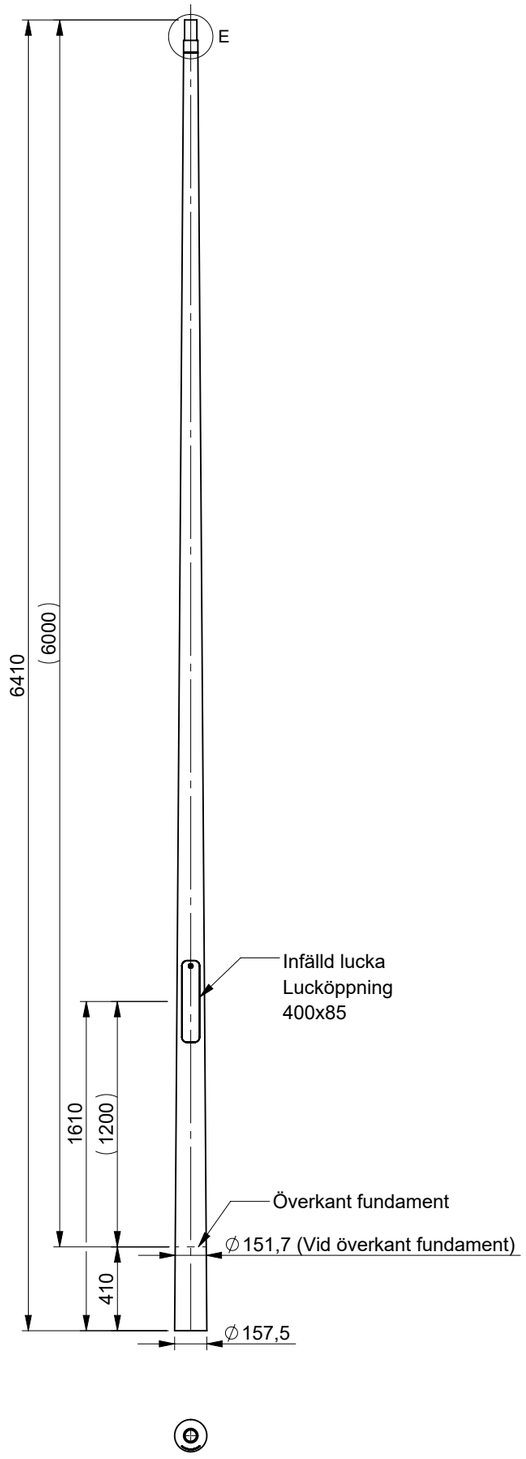



DETAIL E
SCALE 1 : 5

DETAIL D
SCALE 1 : 5

Övriga anvisningar

- Tillverkad enligt: SS-EN 40
- Varmförzinkad enligt: SS-EN 1461
- Där annat inte anges gäller generell tolerans.
- Skarpa kanter brutna
- Konicitet: 14 mm/m
- Fundamentrekomendation:
  Artikelnummer: ST3725
  E-nummer: 7780498
- Övrig dokumentation
  - I0056 - Montageinstruktion - Stolpserie Vinäs

This drawing and all oppurtenant matter shall remain the company Mora Mast AB property. They shall not without our written permission, either in their orignal state or with any changes be copied or manifolded,shown to or in any other way communicated to or handed over to any part.

Material:	Generell tolerans: SS-EN 40	Ritad av: MM	Datum: 2024-11-15	Skala: 1:30
Benämning: KLS 60/68-152 AD60		Godk. av: BÅ	Godk./Datum: 2025-04-30	Format: A3
Ritningsnr: **SS802960**	Vikt: 35.17 kg	Rev: A	Status: Released	Blad: 1/1