



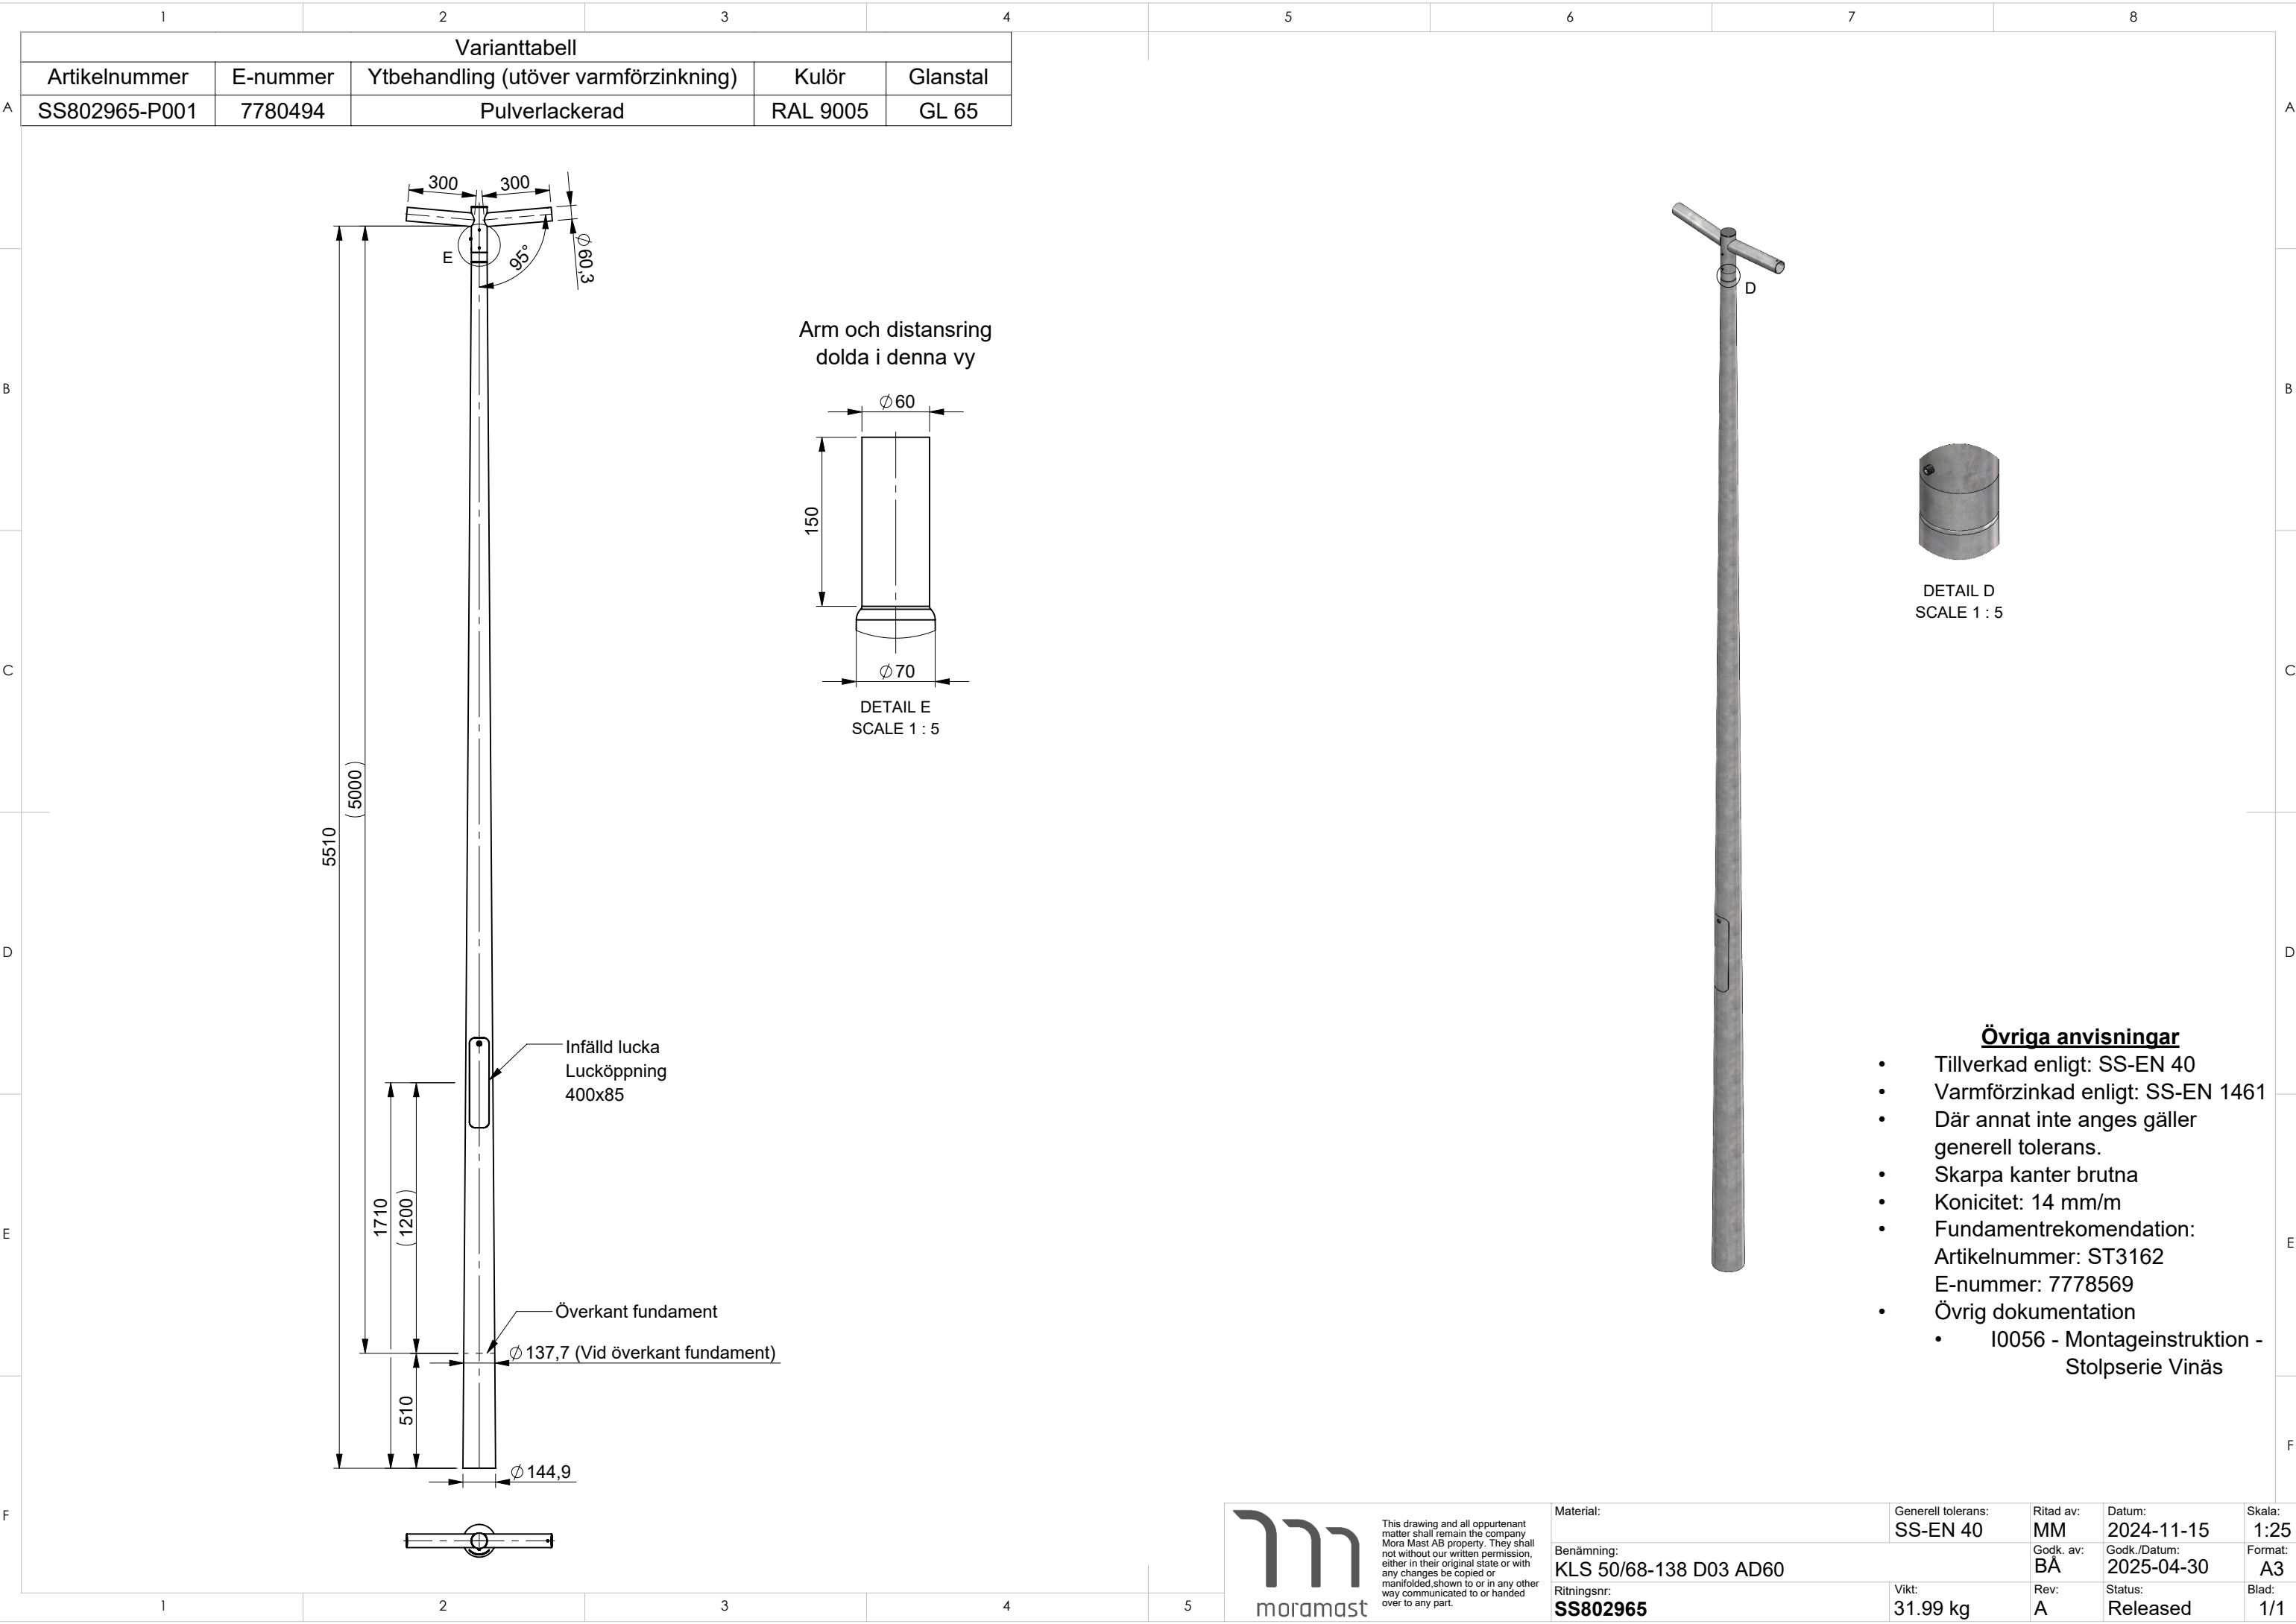

Varianttabell

Artikelnummer	E-nummer	Ytbehandling (utöver varmförzinkning)	Kulör	Glanstal
SS802965-P001	7780494	Pulverlackerad	RAL 9005	GL 65

Arm och distansring
dolda i denna vy

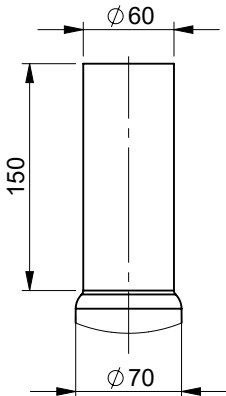

DETAIL E
SCALE 1 : 5



DETAIL D
SCALE 1 : 5

Övriga anvisningar

- Tillverkad enligt: SS-EN 40
- Varmförzinkad enligt: SS-EN 1461
- Där annat inte anges gäller generell tolerans.
- Skarpa kanter brutna
- Konicitet: 14 mm/m
- Fundamentrekommendation:
Artikelnummer: ST3162
E-nummer: 7778569
- Övrig dokumentation
 - I0056 - Montageinstruktion - Stolpserie Vinäs



This drawing and all oppurtenant matter shall remain the company Mora Mast AB property. They shall not without our written permission, either in their original state or with any changes be copied or manifolded, shown to or in any other way communicated to or handed over to any part.

Material:	Generell tolerans:	Ritad av:	Datum:	Skala:
	SS-EN 40	MM	2024-11-15	1:25
Benämning:		Godk. av:	Godk./Datum:	Format:
KLS 50/68-138 D03 AD60		BA	2025-04-30	A3
Ritningsnr:	Vikt:	Rev:	Status:	Blad:
SS802965	31.99 kg	A	Released	1/1